

X-ray / Sensor / Films

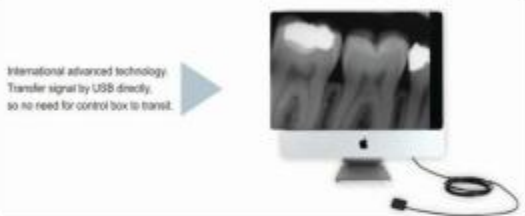
No.	Model No.	Picture	Description
1	SD-XR01 HOT		Moving type Voltage:AC 220V $\pm 10\%$ Frequency:50/60 Hz X-ray plugs:GB 3 cores/EN 3 cores Max power consumption:900 VA Electric current:4 A Fuse :6.3 A Focus:0.8 mm Tube voltage:70KV $\pm 10\%$ Anodic electric current:7mA $\pm 15\%$ Anodic angle:19° Load circle:1/60 Half-value layer:70 KV,If 1.6mm AL Inherent Filtration: ≥ 0.5 mm AL Leaking radiation rate:1m < 0.007mGy/h Packing size:143 ~~51~~ 26cm Weight: 50kgs
2	SD-XR02 HOT		Wall mouted Voltage:AC 220V $\pm 10\%$ Frequency:50/60 Hz X-ray plugs:GB 3 cores/EN 3 cores Max power consumption:900 VA Electric current:4 A Fuse :6.3 A Focus:0.8 mm Tube voltage:70KV $\pm 10\%$ Anodic electric current:7mA $\pm 15\%$ Anodic angle:19° Load circle:1/60 Half-value layer:70 KV,If 1.6mm AL Inherent Filtration: ≥ 0.5 mm AL Leaking radiation rate:1m < 0.007mGy/h Packing size: 90*36*36 cm Weight: 32 kgs
3	SD-XR04 NEW		Moving type Power supply: AC: 220V $\pm 10\%$, 50Hz,1KVA Tube voltage: 60kVp Tube current: 8mA Focus size: 1.5mm Total filtration: 2.5mmAL Exposure time: 0.2 - 4sec Leak radiation: Outside one meter $\leq$ 0.002mGy/h (National standard: 0.25mGy/h) Packing size:143 ~~51~~ 26cm weight: 50kgs
4	SD-10D		Moving type Power supply: AC: 220V $\pm 10\%$, 50Hz,1KVA Tube voltage: 60kVp Tube current: 8mA Focus size: 1.5mm Total filtration: 2.5mmAL Exposure time: 0.2 - 4sec Leak radiation: Outside one meter $\leq$ 0.002mGy/h (National standard: 0.25mGy/h) Packing size:143 ~~51~~ 26cm Weight: 50kgs



X-ray / Sensor / Films

No.	Model No.	Picture	Description
	SD-10DN		New Moving type Power supply: AC: 220V±10%, 50Hz,1KVA Tube voltage: 60kVp Tube current: 8mA Focus size: 1.5mm Total filtration: 2.5mmAL Exposure time: 0.2 - 4sec Leak radiation: Outside one meter ≤ 0.002mGy/h (National standard: 0.25mGy/h) Packing size: 143*51*26cm Weight: 50kgs
5	SD-10B		Wall mouted Power supply: AC: 220V±10%, 50Hz,1KVA Tube voltage: 60kVp Tube current: 8mA Focus size: 1.5mm Total filtration: 2.5mmAL Exposure time: 0.2 - 4sec Leak radiation: Outside one meter ≤ 0.002mGy/h (National standard: 0.25mGy/h) Packing size: 90*36*36 cm Weight: 37 kgs
6	SD-XR03		Extra Long Arm Dental X Ray Unit Dental Extra Long-Arm X Ray Unit Rated voltage: 70KV Current of tube-head: 7Ma Tube-head: From abroad Focus: 0.7mm Support: 220VAC Radiation Leakage: <0.007mGy/h Round Output Section: Focus Skin Distance-20cm Packing size: 143*51*26cm Weight: 50kgs
7	SD-XR188		Multi-fuctional X ray Reader with 2.5 inch monitor display (VIDEO output+ Built-in SD card) can choose to connect with our intra oral camera
8	SD-XR189		USB X-Ray Film Reader/viewer/scanner Voltage: DC 5V (support by computer) Power: 300 mA Signal output: USB 2.0 Accessories: X-ray salver,image software, USB connect cable.

X-ray / Sensor / Films

No.	Model No.	Picture	Description
9	SD-XR190		USB X-Ray Film Reader/viewer/scanner Voltage input: DC 12V Current input: 300mA Signal output: USB2.0 (All digitalize) Cable Length: 2m Accessories: Host/Film tray/USB cable/Software & driver CD.
10	SD-RS01	Runyes oral digital x-ray sensor 	Imported from Europe, adopted with international advanced APS sensor (without data box, connect with USB2.0 directly) 
11	SD-RS02 Made in China HDR-500		Feature of x ray sensor dental digital: 1. Multi-languages with 10 types. 2. Operation system: desk top & laptop (Windows 2000, XP, Win 7, Win 8, Win 10) 3. Twain driver: our RVG compatible with KODAK, SIRONA, SCHICK, etc. 4. Power : USB 2.0 interface 5. Excellent quality: our sensor material imported from Germany and Japan , best quality standards. 6. New APS CMOS sensor with long life time 7. Warranty for 1 years 8. Sensor Active Area : 36×26.5mm (HDR-600); 30×22.5mm (HDR-500).
12	SD-RS02 Made in China HDR-600		
13	SD-RS03 Made in France		Visident French Original RSV5 X ray sensor AN IDEAL SIZE Size 2.0 , you will use it for all application types (anterior, posterior, mole ...) Thanks to its exceptional resolution of 25 pairs, the sensor RSV5 get X-rays of a delicacy and amazing definition
14	SD-RS04 Made in UK		UK Ateco Rvg Digital Dental X Ray Intraoral Imaging Sensor (AT-301)
15	SD-RS05 Made in UK		UK Ateco Rvg Digital Dental X Ray Intraoral Imaging Sensor (AT-302)

X-ray / Sensor / Films

No.	Model No.	Picture	Description
16	SD-RS06 Made in Korean		Yes Biotech From Korea Dental Imaging System Digital X Ray Sensor Yes 001/002 Specifications 1: Original made in Korea dental x-ray unit 2: Moq 1 piece 3: New APS cmos sensor long life time(400,000 times)
17	SD-RS07 Made in Korean		EzSensor provides consistently high resolution and clear images for accurate diagnosis and treatment planning with various size. Easy diagnosis and great experience, EZ sensor
18			EZ Senosr Soft
19	SD-RS08 Smart-1		Feature of x ray sensor dental digital: 1.Multi-languages with 10 types. 2.Operation system: desk top & laptop (Windows 2000, XP, Win 7, Win 8,Win 10) 3.Power :USB 2.0 interface 4.Excellent quality: our sensor material imported from Germany and Japan , best quality standards. 5.New APS CMOS sensor with long life time 6.Warranty for 1 years 7.Sensor Active Area : 36×26.5mm (Smart-2); 30×22.5mm (Smart-1).
20	SD-RS09 Smart-2		
21	SD-X050 Economic		Green X ray unit (convenient low dose) Rating: 60W Mainframe exterior size: 28 * 20 * 8 centimeters Ball-2009140 * Spiral (excluding Canada longituba) Mainframe Weight: 2.5kg Package size: 50*19*42cm Storage conditions: 5-40 degrees Celsius Relative Humidity < 80% Exposure time: 0.2-0.5 seconds Set-up time: 0.1-9.9 seconds

X-ray / Sensor / Films

No.	Model No.	Picture	Description
22	SD-X60		No need to buy lead room/dark room Can choose sensor (RVG) Filmless inspection and storage(iec601-1-3.1993) Tube Voltage 60Kv Tube current 0.2MA Frequency 30KHz Focus points 0.3MM Time of Exposure 0.5-9s (0.05-1.2s) Radiation Leakage less than 20μgy/h Rated Power 60W
23	SD-X80 HOT		Power (V):24V 8000MA Charger 220V/110V 50HZ Tube Voltage: 70KV Tube Current:0.1MA Frequency:30KHZ Time of Exposure:1-9S Radiation Leakage:20μ gy/h Rated Power:60W Environmental Temperature:5-40°C Relative Humidity:<80%
24	SD-X90		Power 24V Tube Voltage 60Kv Tube current 0.2MA Frequency 30KHz Focus points 0.3MM Time of Exposure 0.5-9s (0.05-1.2s) Radiation Leakage less than 20μ Gy/h Rated Power 60W
25	SD-X10		Power 16.8V Tube Voltage 70Kv Tube current 1MA Frequency 80KHz Focus points 0.3MM Time of Exposure 0.5-9s (0.05-1.2s) Radiation Leakage less than 20μgy/h Rated Power 60W 
26	SD-X015		Rayme X-ray Tube Voltage 70Kv. / Tube current 1MA. Frequency 80KHz. / Focal Spot 0.3mm. Time of Exposure 0.1-1.8s. Radiation Leakage less than 20μgy/h. Rated Power 60W. Power Supply: AC100-240V. DC16.4V 50/60HZ. Color: White. Black. Red. Packing weight: 3.5kg

X-ray / Sensor / Films

No.	Model No.	Picture	Description
27	SD-X016		New touch screen X-ray Tube Voltage 80Kv. / Tube current 1MA. Frequency 80KHz. / Focal Spot 0.3mm. Time of Exposure 0.1-2.5s. Rated Power 80W. Power Supply: AC100-240V.50/60HZ. Voltage: DC14.8V /10A.. Battery capacity 6500mAh. Color: White. Packing weight: 4kg
28	SD-X092		No need to buy lead room/dark room Can choose sensor (RVG) Filmless inspection and storage(iec601-1-3.1993) Tube Voltage 60Kv Tube current 0.2MA Frequency 30KHz Focus points 0.3MM Time of Exposure 0.5-9s (0.05-1.2s) Radiation Leakage less than 20μr Rated Power 60W Packing weight: 6kg
29	SD-X091		1 normal working conditions Surroundings temperature 10~30; Relative humidity ≤ 70%; Atmospheric pressure 700hpa~1060hpa; Voltage of electrical source 220V± 10V; Frequency of electrical source 50Hz± 1Hz. 2 surroundings of transportation and reservation Surroundings temperature range -40~+55 Relative humidity range ≤ 93% Atmospheric pressure range 500hpa~1060hpa. weight:8kgs
30	SD-X11		Kodak E speed(150pcs/box) Min order: 50boxes. Package: 50box/carton. 18kgs/carton. 33*30*44cm. Valid for 2.5 years
31	SD-X12		Kodak D speed(100pcs/box) Min order: 50boxes. Package: 50box/carton. 12kgs/carton. 33*30*44cm. Valid for 2.5 years
32	SD-X15		Kodak D speed (100pcs/box) Min order: 50boxes. Package: 50box/carton. 12kgs/carton. 33*30*44cm. Valid for 2.5 years

X-ray / Sensor / Films

No.	Model No.	Picture	Description
33	SD-X16		Italy original dental film (50sets/box) Min order: 20boxes. Package: 20 box/carton. 11kgs/carton. 33*30*44cm. Valid for 2 years
34	SD-X17		Yes Star D Speed Film (100pcs/box) Min order: 80boxes. Package: 80box/carton. 14kgs/carton. 33*30*44cm. Valid for 2 years
35	SD-X18		Yes Star D Speed Film (100pcs/box) With Liquid (250ml/bottle) Min order: 80sets. Film Package: 80box/carton. 14kgs/carton. 33*30*44cm. Liquid Package: 40bottle/carton. 15kg/carton. 33*30*44cm. Valid for 2 years
36	SD-X19		Yes Star E Speed Film(150pcs/box) Min order: 80boxes. Package: 80box/carton. 14kgs/carton. 33*30*44cm. Valid for 2 years
37	SD-X20		E Speed Film(100pcs/box) Min order: 100boxes. Package: 50box/carton. 10kgs/carton. Valid for 2 years
38	SD-X21		Film Positioning System X Ray Machine Holder Min order: 10sets. Package: 10sets/carton. 10kgs/carton. Carton size:25*33*40cm



Villa Healthcare Co. Ltd



P.O. Box 10255, Arusha - Tanzania



+255 755 010 176 | +255 760 908 614



+255 683 487 679 | +255 756 046 693



villahealthcaretz@gmail.com |